

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

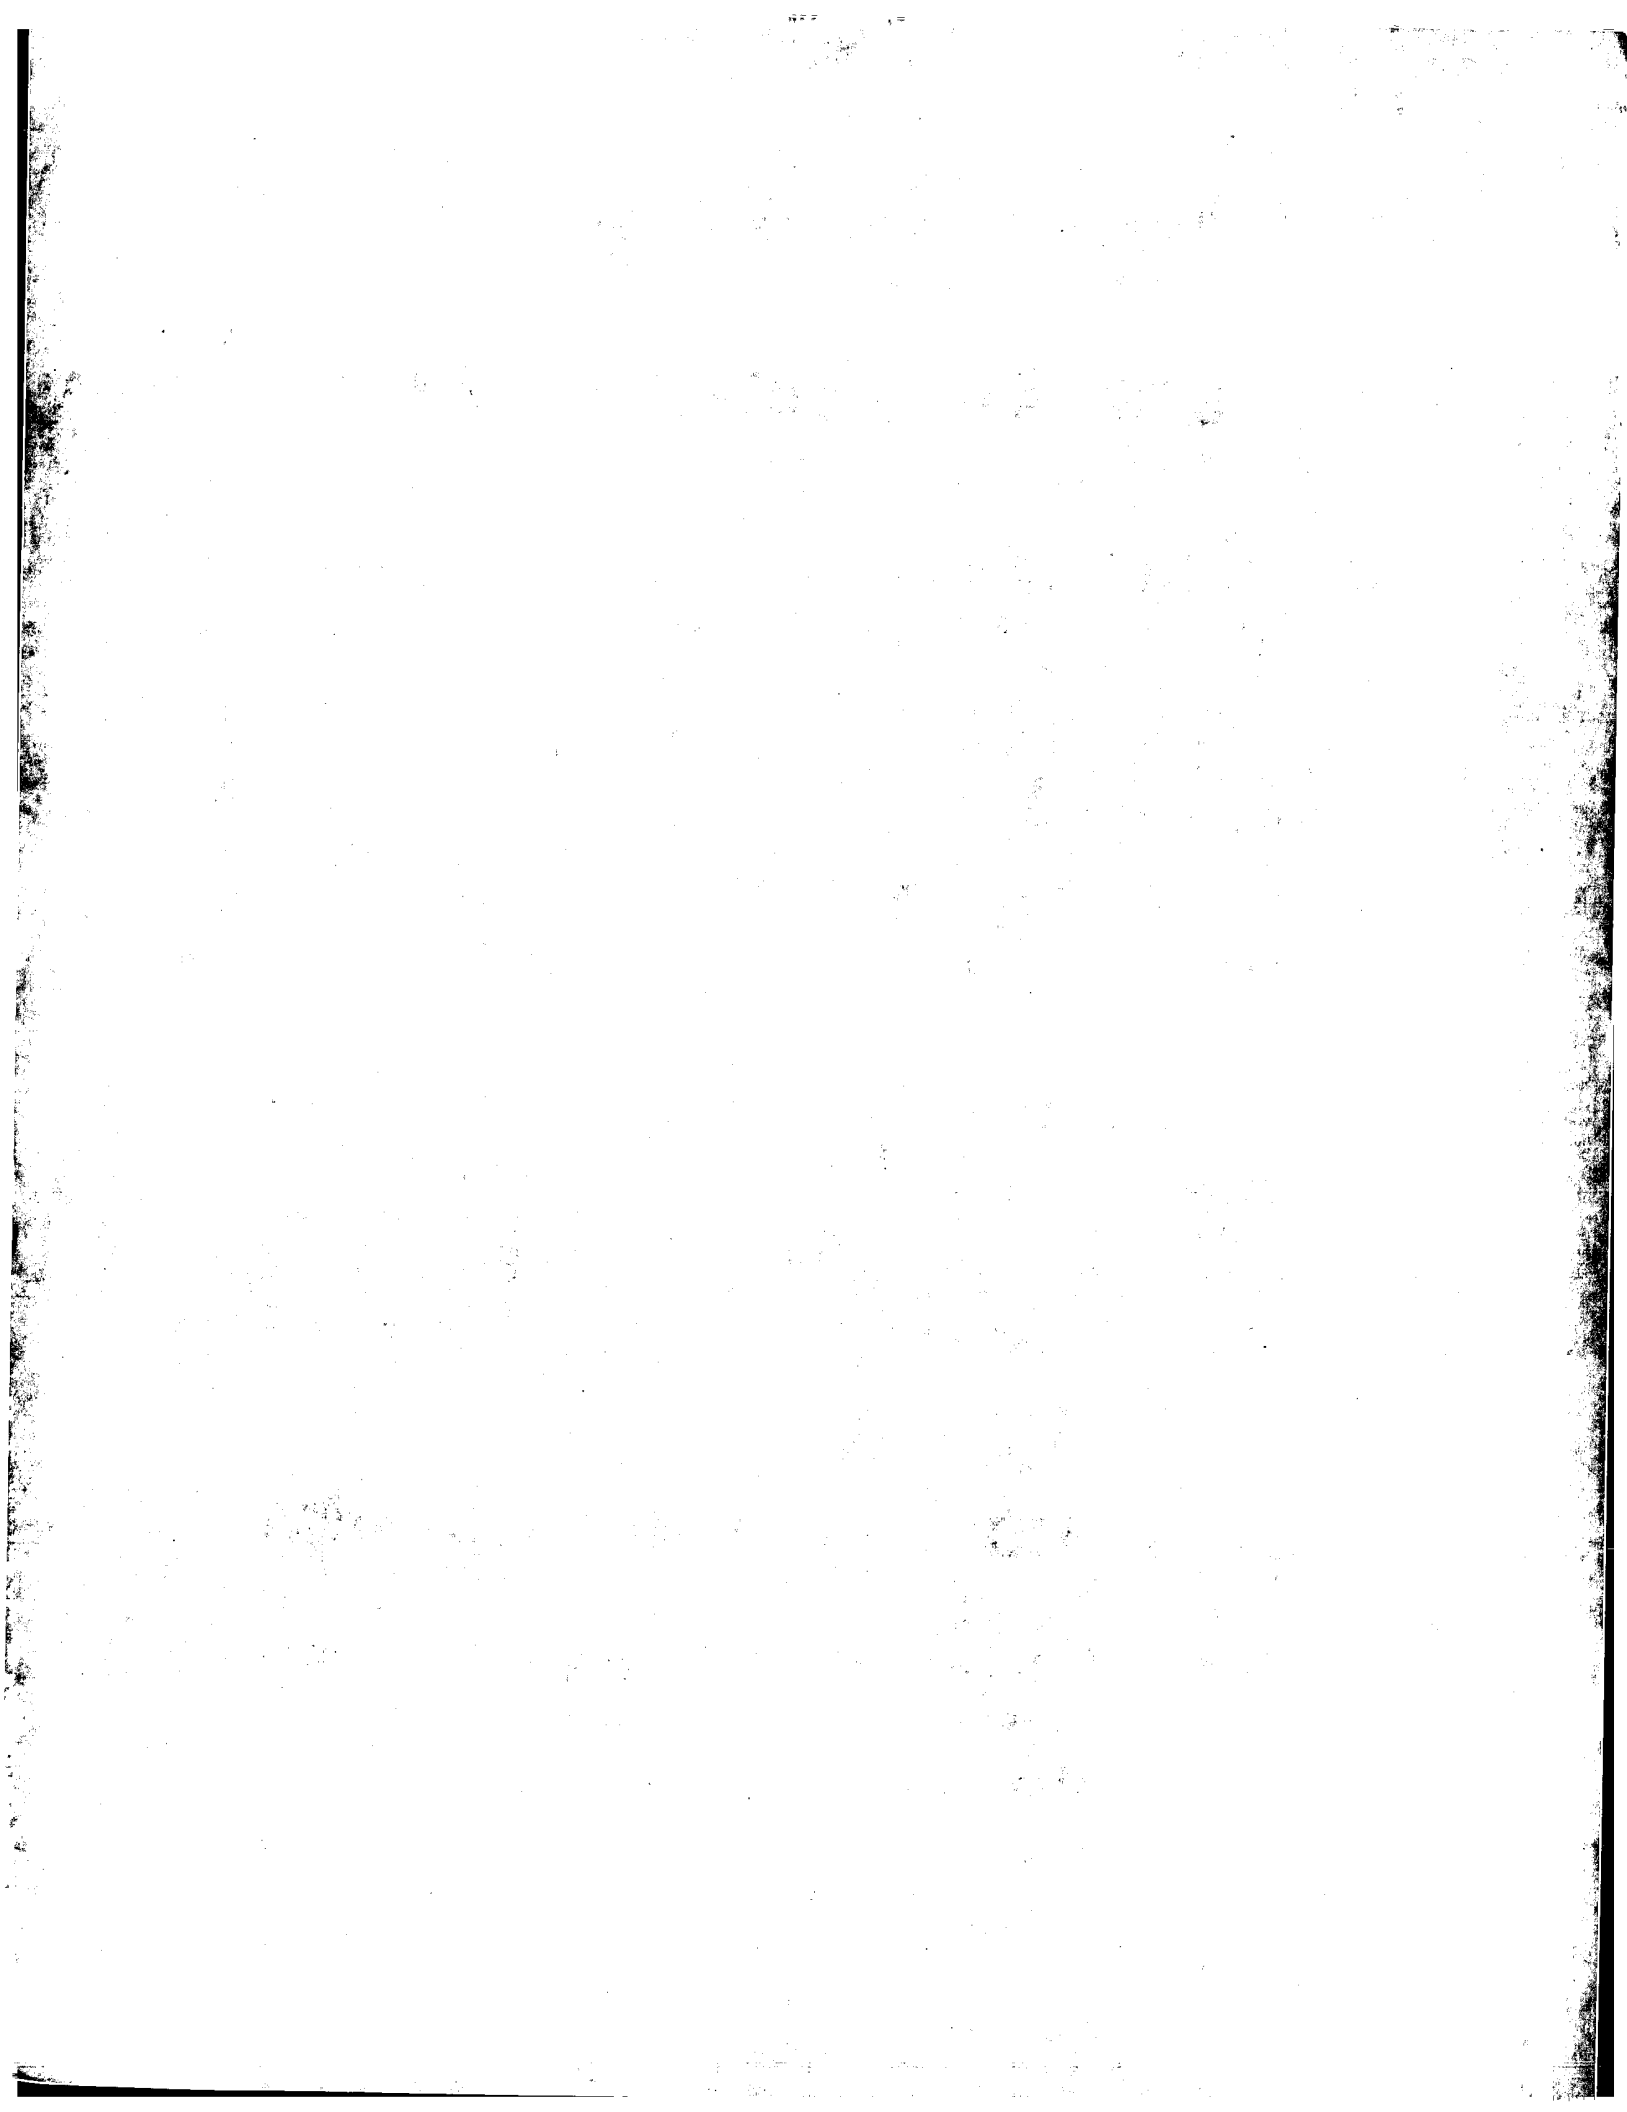



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT(s): Wilson et al.  
SERIAL NO.: 10/740,035  
FILED: December 18, 2003  
TITLE: In-Mould Labelling  
ATTORNEY DOCKET NO.: 884A.0031.U1(US)

ART UNIT:  
EXAMINER:

Commissioner for Patents  
P. O. Box 1450  
Alexandria, VA 22313-1450

Transmittal Of Certified Copy

Sir:

Applicant(s) claim the benefit of the following prior foreign patent application under 35 U.S.C. §119 for the above-identified U.S. patent application:

Country: United Kingdom  
Application No.: 0328832.1  
Filing Date: December 12, 2003

Attached is a certified copy of the foreign application from which priority is claimed.

Respectfully submitted,

Harry F. Smith (Reg. No. 32,493)

Date


**Customer No.: 29683**  
Harrington & Smith, LLP  
4 Research Drive  
Shelton, CT 06484-6212  
203-925-9400

CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail on the date shown below in an envelope addressed to: Commissioner for Patents, P. O. Box 1450, Alexandria, VA 22313-1450.

Date

Lynn Maroldi





INVESTOR IN PEOPLE


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

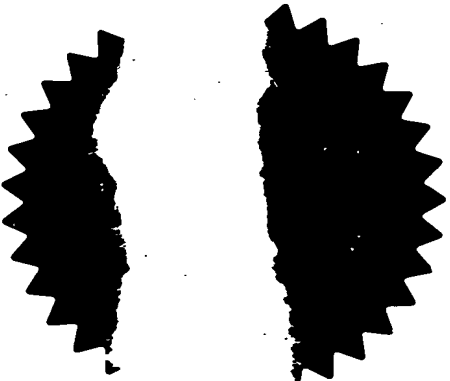

Signed *Andrew Gersey*  
Dated 16 January 2004






12DEC03 E859069-3 002833  
P01/7700 0.00-0328832.1 CHEQUE

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

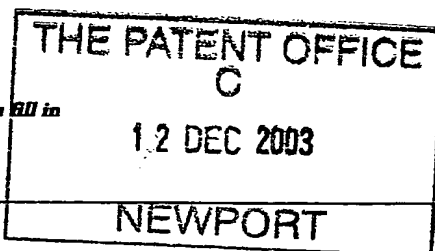

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference  
PH/8584

2. Patent application number  
(The Patent Office will fill this part in)

0328832.1

12 DEC 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Nokia Corporation,  
Keilalahdentie 4, FIN-02150,  
Espoo, Finland

Patents ADP number (if you know it)

7652217001

If the applicant is a corporate body, give the country/state of its incorporation

Finland

4. Title of the invention

In-Mould Labelling

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Swindell & Pearson

48 Friar Gate  
Derby  
DE1 1GY

Patents ADP number (if you know it)

00001578001

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)

Number of earlier UK application

Date of filing  
(day / month / year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

Yes

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO (See note d)

## Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form	0
Description	15
Claim(s)	8
Abstract	1
Drawing(s)	9 + 9 RM

10. If you are also filing any of the following, state how many against each item.

### Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for a preliminary examination and search (Patents Form 9/77) 1

Request for a substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

Swindell & Pearson

Date 11/12/2003

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

Paul Higgin - 01332 367051

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.



1  
DUPLICATE

## TITLE

In-Mould Labelling

## BACKGROUND TO THE INVENTION

5

Embodiments of the present invention relate to In-Mould Labelling. In particular, embodiments relate to Fabric In-Mould Labelling.

10 Users of radio telephones and other portable devices may want to change the appearance of their device by replacing its housing or cover with another of a different appearance. Such replaceable covers include in-mould decorated covers.

The in-mould labelling (IML) process typically involves the following steps.  
15 First, the desired pattern is printed on a film, then, the printed film is thermo-formed into the desired three-dimensional shape i.e. the cover or housing of a radio telephone. Next, a pre-form is cut from the shaped film and is placed in a mould tool and held in place using vacuum suckers. Then polymer is injected into the mould cavity and bonded with the pre-form. The result is a  
20 decorated moulded article.

It would be desirable to provide a greater variety of coverings for articles. It would, for example, be desirable to provide fabric coverings.

25 Finish Utility model 5838, granted 30<sup>th</sup> June 2003, describes a technique for forming a fabric-covered article using the In-Mould Label (IML) process. This technique may conveniently be referred to as the Fabric In-Mould Label process. In this process, fabric is laminated to a film, which may be a polymer film. The laminate is thermo-formed into a 3D shape. A pre-form label is then  
30 cut from the formed laminate and placed into an injection moulding tool. Material such as plastics or polymer is injected into the mould and adheres to the film portion of the laminate pre-form. The result, an In-Mould Label (IML),



is a moulded article with the fabric surface of the label pre-form over at least part of one or more surfaces.

5 There are various problems associated with the FIML process. One problem is how to accurately locate the fabric label within the injection moulding tool without marking or damaging the fabric. Another problem is how to create a pre-form in a manner that does not form an undesirable artefact in the finished article such as marks on the fabric from cutting and an irregular boundary to the edge of the fabric.

10

#### FIELD OF THE INVENTION

According to one embodiment of the invention there is provided an In-Mould Labelling process comprising: clamping a label within a mould void of an  
15 injection moulding tool; and injecting material into the mould while the label is clamped. The clamping may involve a plurality of resiliently biased clamping members that extend at least partially into the mould void while clamping the label.

20 This allows a fabric label to be accurately located within an injection moulding tool without marking or damaging the fabric.

According to another embodiment of the invention there is provided an In-Mould Labelling apparatus comprising: a multi-portion body defining a mould  
25 void and at least one conduit for injecting material into the mould void; and a plurality of clamping members extending at least partially into the mould void for clamping a label within the mould void.

According to another embodiment of the invention there is provided a  
30 moulded article having an exterior surface, the article comprising: an injection moulded body having a plurality of slots extending through the body; and a



label that extends over at least a portion of the exterior surface of the article, wherein portions of the label are received within the slots.

According to another embodiment of the invention there is provided a

- 5 moulded article having an exterior surface, the article comprising: an injection moulded body comprising a groove; and a label comprising a plurality of edges, wherein the label extends over at least a portion of the exterior surface of the article and the edges of the label are received within the groove.

- 10 According to another embodiment of the invention there is provided an article comprising: a first injection moulded part having a plurality of first slots extending through the first injection moulded part; a second injection moulded part having a plurality of second slots extending through the second injection moulded part; and a label that extends over at least a portion of the first
- 15 injection moulded part and a portion of the second injection moulded part, wherein portions of the label are received within the first slots and within the second slots.

According to another embodiment of the invention there is provided an In-

- 20 Mould Labelling apparatus comprising: a multi-portion body defining a first mould void and at least one conduit for injecting material into the first mould void, a second mould void and at least one conduit for injecting material into the second mould void ; and means for placing a label so that it extends from the first mould void to the second mould void.

25

According to another embodiment of the invention there is provided an In-Mould Labelling process comprising: placing a label between a first mould void and a second, separate mould void; and injecting material into the first and second mould voids.

30



According to another embodiment of the invention there is provided a laminate label for use in an injection moulding process comprising a substrate layer and a fabric layer.

- 5 According to another embodiment of the invention there is provided a method of forming a pre-form label for use in an in mould labelling process comprising: moulding a laminate comprising a substrate layer and a fabric layer to indent a continuous portion of the laminate; and cutting the laminate so that it terminates at the continuous indented portion.

10

The indentation of the continuous indented portion allows the cut edge of the label to be hidden from view in a finished article. Thus visible artefacts in the finished article are avoided.

## 15 BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, of which:

- 20 Figure 1A is a front plan view of a battery cover with fabric in-mould label according to an embodiment of the present invention;  
Figure 1B is close-up plan view of a portion of the cover illustrated in figure 1A;  
Figure 1C is a rear plan view of the battery cover of figure 1A;  
25 Figure 1D illustrates a cross-section of the battery cover along the line A-A of figure 1D;  
Figure 1E illustrates a cross-section of the battery cover along the line B-B of figure 1D;  
Figures 2A, 2B and 2C illustrate a section through a cavity label location  
30 system for manufacturing an electronic device cover having a fabric in-mould label, such as the battery cover of figure 1A;





Figure 3 illustrates the provision of teeth in the mould tool to secure the fabric label during the manufacturing process, and the resultant cover;

Figure 4A and 4B illustrate, in side view, a two-part electronic device according to an embodiment of the invention having a continuous fabric surface over both parts;

Figure 5 is a front perspective view of a two part electronic device such as that of figures 4A and 4B, shown in the closed position;

Figure 6 is a front view of a two-part device, such as that of figures 4A and 4B, shown in the open position;

Figure 7 is a fabric in-mould label tool for manufacturing an electronic device such as that shown in figures 4A and 4B with a fabric wrap; and

Figures 8A, 8B and 8C illustrate a 3D Fabric In-Mould Label process and

Figure 8D illustrates an article formed by the process; and

Figure 9 illustrates a multi- axis cutting mechanism.

15

## DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

Embodiments of the invention use the Fabric In-Mould Label process. In this process, fabric is laminated to a film, which may be a polymer film. The

laminates may be thermo-formed into a 3D shape. A label is then cut from the laminate and placed into an injection moulding tool. The label may be two-dimensional or, if the laminate was formed, a three-dimensional pre-form.

Material such as plastics or polymer is injected into the mould and adheres to the film portion of the laminate pre-form. The result, an In-Mould Label (IML),

is a moulded article with the fabric surface of the label pre-form over at least part of one or more surfaces.

Figure 1A illustrates a battery cover for an electronic device such as a radio telephone formed using the FIML process. The battery cover 100 is a FIML comprising polymer 110 and a fabric laminate 120. The fabric laminate 120 may, for example, be 0.8 millimetre thick Alcantara bonded to 0.2 millimetre polycarbonate/ABS film using a polyurethane thermobond adhesive. The

30



cover 100 comprises location tabs 124 formed from the polymer 110, which, in use, correspond to recesses in the body portion of the electronic device to position the cover with respect to the body portion.

5 Figure 1B is a close-up plan view of the left hand top corner of figure 1A indicated by dotted lines. From figure 1B, it can be seen that the cover 100 has a continuous groove 121 running along the interface between the polymer 110 and the edge of the fabric 120. This groove can be more clearly seen from the rear view of the cover illustrated in figure 1C and the corresponding  
10 cross-sections A-A and B-B shown in figures 1D and 1E respectively. The groove 121 receives the edge of the fabric laminate 120 within it. The edge is placed at the bottom of the groove 121. The groove thus conceals the edge of the fabric 120.

15 Figure 1D illustrates the cross-section of a portion of the groove 121 that has a base defined by a wall-strengthening portion 122. The provision of the wall-strengthening portion 122 enables the polymer to have a constant thickness  $d$  of one millimetre ( $\pm 0.1$  millimetre) along the line A-A. As can be seen, in this embodiment, eight portions of the groove have wall-strengthening portions  
20 122 at their base, two along each side of the cover 100. Between these portions, the groove does not have a base and forms a slot opening through the polymer 110 of the cover 100, as illustrated in figure 1C and the cross-section along line B-B shown in figure 1E. The fabric within these slot openings has gripper orifices 123. Such gripper orifices 123 are formed as  
25 the result of the provision of teeth 301 piercing the fabric laminate to hold it securely in position during construction of the cover 100 (see figures 2 and 3 and the corresponding description below).

Figures 2A, 2B and 2C illustrate a cross-sectional view through the tool of a  
30 cavity label location system. The tool is particularly suitable for 2D and 2.5D labels. The tool comprises a label location core 230, mould cavity 220 and mould core 210. Mould core 210 is fixed and separate from the label location



core 230 and the mould cavity 220. The label location core 230 has a locating portion 232 that extends through an opening 224 in the mould cavity 220. The label location core 230 and mould cavity 220 move together towards the mould core 210. When the mould cavity 220 abuts the mould core 210, the label location core moves relative to the mould cavity 220 and the locating portion moves within the opening 224.

The mould core 210 comprises a main body 211 and an injection barrel 212 within the main body 211, as is conventional in in-mould label (IML) tools. However, the moulded core also has clamping ribs 213. Each clamping rib 213 has, in this example, a projection 214 at an end facing the mould cavity 220 and a resilient member 215 at its other end, which serves to resiliently bias the clamping rib 213 towards the mould cavity 220. As figure 2 is a section of the whole tool, it only illustrates two clamping ribs. However, as will be appreciated by a person skilled in the art, the tool for providing a cover such as that in Figure 1 will typically comprise a clamping rib for each slot opening 121: that is eight ribs in total.

The mould cavity 220 is sized to receive a trimmed fabric laminate label 201 of desired shape within its opening 224. The fabric laminate label 201 is typically a fabric laminate, such as that shown in figure 1A (referenced 120). In this embodiment, the surface of the mould cavity 220 facing the mould core 210 has cut-outs 222 which provide a mould surface for a particular shape of cover. Resilient members 221 are provided between the mould cavity 220 and label location core 230 to resiliently bias the mould cavity 220 towards the mould core 210.

The label locating core 230 is movable and has a locating portion 222 with projections 231 adjacent the edge of the opening 224 and toward the mould core 210.



Figure 2A illustrates the tool after a laminate label 201 has been placed in it. The mould cavity 220 and label locating core 230 have a first configuration, in which the mould cavity 220 is biased towards the mould core 210 by resilient member 221. The locating portion 222 of the locating core is retracted within  
 5 the opening 224 of the mould cavity forming a recess that receives the laminate label 201. The laminate label 201 is positioned within the recess, so that it abuts the projections 231 of the locating portion 222 of the label location core 230. The recess holds the label in a desired position.

10 Figure 2B illustrates the clamping of the laminate label 201 into position. The label location core 230 is moved towards the mould core 210. The label location core 230 and mould cavity 220 move together towards the mould core 210 with the label 201 positioned with the recess. The resilient members 221 contact the label 201 holding it against the projections 231. Then as the  
 15 label location core 230 continues to move, the respective opposing faces 223 and 216 of the mould cavity 220 and mould core 210 contact each other. Continued force applied to the label location core acts against the resilient members 221 so that the locating portion 222 of the label location core 230 moves towards the mould core and extends from the opening 224 of the  
 20 mould cavity 220, thereby reducing the cavity housing the laminate label 201 and pushing the laminate label 201 towards the front of the mould cavity 220. Resilient members 215 are likewise compressed, resulting in the clamping ribs 213 withdrawing into the mould core 210. However, opposing forces between the clamping ribs 213 of the mould core 210 and the projections 231  
 25 of the label location core 230 enable the laminate label 201 to be clamped as the label is moved into position and while it is in position.

Figure 2C illustrates the injection of the polymer into the tool. With force still applied to the label location core 230, a polymer is injected into the tool via  
 30 injection barrel 212 until the polymer has filled the space between the label location core 230, mould core 210 and the mould cavity 220 pressing the laminate label 201 against the end of the locating portion 222 of the label





location core 230. That is, until the polymer has filled the space defined, on the one side, by the surfaces of the laminate label 201 and mould cavity cut-outs 222, and, on the other side, by the opposing surfaces of the mould core 210 and clamping ribs 213. The label is thus 'formed' in-situ, with its edges  
5 encapsulated with the groove 121. The polymer bonds with the laminate label 201, and they become, as a combination, the desired moulded cover. The label location core 230 is then moved away from the mould core. This results in the resilient members 215 returning to their unbiased states, thereby causing the clamping ribs 213 to extend once again from the mould core 210  
10 and in effect acting as ejectors for the moulded cover. The laminate label 201 is compressed during moulding but recovers after removal from the tool.

Operation of the cavity label location system tool is automated, as is the insertion of a fabric laminate label 201 into the tool and the removal of the  
15 resultant moulded cover from it. The fabric laminate labels are supplied in a magazine.

Figures 4-6 illustrate a two-part electronic device such as a radio telephone according to an embodiment of the present invention. Figure 4A illustrates a  
20 side view of the two-part device in the closed position. Figure 4B illustrates a side view of the two-part device in the open position. The device has a first part 401 and a second part 402 which are connected via a hinge 403 and comprise fabric IMLs made up of fabric 420 covered polymer 410.

25 In the embodiment shown in figures 4-6, the device has a continuous fabric surface 420 over both parts 401, 402, which provides an aesthetically pleasing result. The first part 401 has a first polymer portion 404 and a first fabric portion 421, which together form a removable cover or housing, whilst the second part 402 has a second polymer portion 405 and second fabric  
30 portion 422 which, in this embodiment, together form a battery cover. A third fabric portion 423 links the first and third fabric portions 421, 422 and covers



the hinge. As can be seen in figures 4A and 4B this third fabric portion 423 is sized such that it is taut when the device is closed.

5 The fabric portions 421 and 422 are attached to the first and second polymer portions 404, 405 by the FIML process illustrated in figure 7, and described below.

Figure 5 shows a perspective view of a two-part device, such as that of figure 4, in a closed position. As can be seen from the Figure, in this embodiment, 10 the two-part device 500 again has parts constituted by fabric IMLs. For example, the front cover is made up of a polymer 510, which is partially covered by fabric 520. As in the battery cover embodiment of figure 1, the front cover has a bottom and side edges, which are constituted of polymer and a central region, which is constituted of bonded fabric, and polymer. Like 15 the figure 1 embodiment, the front cover may have a groove running along the interface between the visible portion of the polymer 510 and the edge of the fabric 520 to improve the edge quality of the visible fabric and to improve its protection from damage. However, in contrast to the figure 1 cover, the top edge of the front cover is covered by fabric. As mentioned with regard to 20 figure 4, the fabric is continuous from the front to the rear of the device. In figure 5, an opening 530 is provided for a lanyard 540 or eyelet. This is preferably provided in the portion of the fabric 520 that covers the hinge.

Figure 6 illustrates a front view of a two-part device, such as that of figure 4, 25 shown in the open position. In this case, the two-part device is a portable telephone 600. The portable telephone 600 comprises a main body 601 pivotally connected to a flip 602 by a hinge 603. Figure 6 shows the flip 602 in an open position in relation to the main body 601.

30 The main body 601 comprises a casing 604 that houses the main internal control circuitry of the telephone 600. The casing 604 carries a keypad 620 and power button 623, and forms, towards the front end a chin 624 below



which is housed a microphone. A microphone port 640 is provided through the casing 604. The rear end of the upper casing upsweeps to a pair of knuckles 625 of the hinge 603. The keypad 620 comprises alphanumeric key 622 and function key 621 to provide conventional telephone operations.

5

The flip 602 likewise comprises a casing 605 which houses further electronic components such as an LCD 610, an earpiece 630, and associated circuitry.

10 The microphone and earpiece 630 are positioned at opposite ends of the two parts of the phone to maximise the distance between them, such that this distance approximates the distance between the ear and the mouth of the user.

15 With the flip 602 in the closed position, such as in figure 5, it covers the keypad 620 and its upper edge skirts the chin 624. In the open position of figure 6, the flip 602 is pivotally spaced from the main body 601 and the portable telephone 600 is ready for use.

20 Figure 7 illustrates a cross-sectional view through the tool of a cavity label location system suitable for creating first and second polymer portions 404, 405 as illustrated in Figs 4A and 4B. A continuous fabric surface 420 extends over both parts 401, 402 and joins the parts via a fabric 'hinge' portion 423. The continuous fabric surface is formed from a single fabric laminate label 701.

25

The tool comprises a label location core 730, a mould cavity 720 and a mould core 710.

30 As in Figs 4A to 4C, when the label location core 730 and mould cavity 720 are moved towards the mould core 710, the label is held in position between the label location core 730 and mould core 710. This process may be similar to that described with reference to Figs 4A-4C, with the location core moving



relative to the mould cavity so that projections 731 of the location core 230 and the mould core 710 co-operate to clamp the label 701 in position. The mould core 710 may have resiliently biased clamping ribs 714 for clamping the label 701.

5

The label location core 730 and the mould core additionally co-operate to define a 'shut-off' volume 750 into which injected polymer 740 cannot enter. As the projections 731 of the location core 230 and the mould core 710 co-operate to clamp the label in position, a projection 718 from mould core 710  
10 clamps the label 701 against the label location core. The projection 718 is continuous and forms a barrier to polymer 740 creating the 'shut-off' volume 750. The portion of the label 701 to one side of the shut-off volume 750 will be integrated into the first polymer portion 404 illustrated in Figs 4A and 4B and the label 701 on the other side of the shut-off volume 750 will be integrated  
15 into the second polymer portion 405 and the label 701 within the shut-off volume will form the interconnecting 'hinge' portion 423 of the continuous fabric surface 420.

Polymer 740 is then injected into the tool via injection barrels 212A and 212B  
20 on either side of the shut-off volume 750 until the polymer 740 has filled the space between the label location core 730, mould core 710 and the mould cavity 220 excluding the shut-off volume. This presses the label 701 against the end of the label location core 730. The polymer 740 bonds with the label 701, and they become, as a combination, the desired moulded polymer  
25 portions 404, 405 with the integrated continuous fabric surface 420 joining them together via the 'hinge' portion 423.

The label location core 730 is then moved away from the mould core 710.

30 The shut-off volume 750 may, for example, be of sufficient size to house a lanyard or eyelet 760 attached to the label 701.





The use of clamping in the above described methods enable a fabric label to be accurately and securely located within the injection moulding tool without marking or damaging the fabric.

- 5 Let us now turn to the other problem of how to create a three dimensional pre-form in a manner that does not form an undesirable artefact in the finished article such as marks on the fabric from cutting and an irregular boundary to the edge of the fabric.
- 10 In order to avoid misalignment between the geometry of the injection moulded material and the edge of the label, the edge of the label 801 is hidden from view as illustrated in Figure 8D in an assembled article 800.

Figures 8A, 8B and 8C illustrate a laminate performing, trimming and In-Mould Label process. In this process, a fabric layer 810 is laminated to a film substrate 812 to form a laminate 814. The laminate 814 is thermo-formed into a 3D shape using a vacuum and/or high pressure forming machine. The three-dimensional laminate 814 has a inwardly extending lip 816 feature that forms an indent in the exterior fabric surface of the formed laminate

20

A pre-form label 801 is then cut, using a single axis hardened steel cutter 820, from the formed laminate 814 at the inwardly extending lip/indent feature 816 as illustrated in Fig 8A. The cut is made at the lip/indent feature 816, which is a portion of the laminate that will be hidden when the formed article 600 is in use. The lip/indent feature 816 is retained in the pre-form label 801 as illustrated in Fig 8B.

25

The lip/indent feature terminates the pre-form label 801. The lip/indent feature after cutting may only extend inwardly, or, as illustrated in Fig 8B, it may extend inwardly and then downwardly to its terminus.

30



The pre-form label 801 has a substantially flat portion, sidewall portions and an inwardly extending lip/indent feature 816 that terminates the sidewalls.

5 The pre-form label 801 is then placed into a mould void 830 formed by an injection moulding tool 832. Material such as plastics or polymer is injected into the mould void via the conduit 834 and adheres to the film portion 812 of the laminate pre-form label 801. The pre-form label 801 may be held in place using clamping members (not shown) as described above.

10 The resultant article 840, an In-Mould Label (IML), is a moulded article with a lip/indent feature 816. The fabric surface 810 of the label pre-form 801 extends over the surface of the side wall of the article 840 and its edge terminates at a lip/indent feature 816. Fig. 8E illustrates the resultant article assembled into the housing a mobile cellular telephone. In the assembled  
15 housing, a portion 842 of the housing overlaps the lip/indent feature 816 and the edge of the label 801 is hidden from view as illustrated in Figure 8D.

Although, a single axis cutting mechanism is illustrated in Fig. 8B, a multi-axis cutting mechanism may also be used as illustrated in Fig 9.

20

Although the above FIML process has been described with reference to a particular example in which the fabric is Alcantara non-woven microfibre bonded to 0.2 millimetre polycarbonate film, it should be appreciated that other fabrics and films may be used. For example, woven, synthetic or natural  
25 fibres may be used for the fabric, although it may then be desirable to cut the pre-form using a heated cutter, an ultrasonic cutter or a laser. Alternatively, made-made fabric may be used. The currently preferred man-made fabric is Alacantara, however, Winter Komosho (polyester), Nylon and real leather may also be used although not as successfully.

30



Although embodiments of the invention have been described with reference to various examples, it should be appreciated that various modifications may be made thereto without departing from the spirit and scope of the invention.

5 I/we claim:

10



## CLAIMS

1. An In-Mould Labelling process comprising:
  - 5 clamping a label within a mould void of an injection moulding tool; and  
injecting material into the mould void while the label is clamped.
  2. A method as claimed in claim 1, wherein clamping occurs automatically as  
a result of a mould forming process.
  - 10 3. A method as claimed in claim 2, wherein the mould forming process  
comprises:  
relative movement between a mould cavity, a label location core and a mould  
core until the mould cavity and the mould core abut to define a portion of the  
15 mould void and until the label location core and the mould core abut to define  
a further portion of the mould void and clamp the fabric label
  4. A method as claimed in claim 3, wherein the label location core and the  
mould core co-operate to define a shut-off volume into which injected material  
20 cannot enter
  5. A method as claimed in claim 4, wherein the shut-off volume receives a  
lanyard or eyelet attached to the label.
  - 25 6. A method as claimed in claim 3, 4 or 5, wherein the label location core  
moves through an opening in the mould cavity towards the mould core and  
wherein the mould core comprises clamping members that extend toward the  
label location core for abutting the label location core and clamping the fabric  
label.





7. A method as claimed in claim 6, wherein the clamping members are resiliently biased for full extension toward the label location core.

5 8. A method as claimed in any one of claims 3 to 7, wherein the label location core has a projection or projections towards the mould core for clamping the fabric label.

10 9. A method as claimed in claim 8, wherein the projection is a continuous projection

10. A method as claimed in any proceeding claim, wherein clamping involves a plurality of resiliently biased clamping members that extend at least partially into the mould void while clamping the label.

15 11. A method as claimed in claim 10, wherein a clamping member is positioned at, at least, each corner of the label.

20 12. A method as claimed in claim 10 or 11, wherein the label is a laminate comprising a substrate layer and a fabric layer and the clamping members abut the substrate layer.

25 13. A method as claimed in claim 12, wherein the clamping member comprises gripping projections located where the clamping member abuts the laminate label

14. A method as claimed in claim 12 or 13, wherein the laminate label is pre-formed to a desired shape.

30 15. An In-Mould Labelling apparatus comprising:  
a multi-portion body defining a mould void and at least one conduit for injecting material into the mould void; and



a plurality of clamping members extending at least partially into the mould void for clamping a label within the mould void.

- 5 16. An apparatus as claimed in claim 15, wherein the multi-portion body comprises a mould cavity, a label location core and a mould core arranged for relative movement and having a first injection configuration in which they co-operate to define the mould void and clamp the label within the mould void and a second non-injection configuration for releasing a moulded article.
- 10 17. An apparatus as claimed in claim 16, wherein the label location core and the mould core are arranged to co-operate in the first injection configuration and define a shut-off volume into which injected material cannot enter.
- 15 18. An apparatus as claimed in claim 17, wherein the shut-off volume is sized to house a lanyard or eyelet attached to the label.
- 20 19. An apparatus as claimed in any one of claims 15 to 18, wherein the mould cavity and the mould core abut, in the first injection configuration, to define a portion of the mould void, and the label location core and the mould core abut, in the first injection configuration, to define a further portion of the mould void and clamp the label
- 25 20. An apparatus as claimed in claim 19, wherein a portion of the mould cavity facing the mould core has cut-outs that provide for a particular shape of mould void.
- 30 21. An apparatus as claimed in any one of claims 15 to 20, wherein the mould cavity has an opening, the clamping members extend from the mould core, and the label location core, in the injection configuration, extends through the opening towards the mould core and abuts the clamping members.



22. An apparatus as claimed in claim 21, further comprising a bias between the label location core and mould cavity resisting movement of the locating portion through the opening.
- 5 23. An apparatus as claimed in claim 22, further comprising a mechanism for moving the label location core towards the mould core.
24. An apparatus as claimed in any one of claims 15 to 23, wherein the label location core has a projection or projections towards the mould core for  
10 clamping the label.
25. An apparatus as claimed in claim 24, wherein the projection is a continuous projection.
- 15 26. An apparatus as claimed in any one of claims 15 to 25, wherein the clamping members are resiliently biased.
27. An apparatus as claimed in any one of claims 15 to 26, wherein the label has a plurality of corners and one of the clamping members is positioned at  
20 each corner of the label.
28. An apparatus as claimed in any one of claims 15 to 27, wherein each clamping member comprises gripping projections located where the clamping member abuts the label .  
25
29. A moulded article manufactured in accordance with the method as claimed in any one of claims 1 to 14.
30. A moulded article having an exterior surface, the article comprising:  
30 an injection moulded body having a plurality of slots extending through the body; and



a label that extends over at least a portion of the exterior surface of the article, wherein portions of the label are received within the slots

5 31. A moulded article as claimed in claim 30, wherein the portion of the exterior surface of the article over which the label extends comprises a plurality of corners and a slot is positioned, at least , at each of the plurality of corners.

10 32. A moulded article as claimed in claim 30 or 31, wherein the portions of the label received within the slots has gripping artefacts.

33. A moulded article as claimed in any one of claims 30 to 32, wherein the label is a laminate comprising a substrate layer and a fabric layer.

15 34. A moulded article as claimed in any one of claims 30 to 33, wherein the label has edges and the injection moulded body comprises a groove for concealing the edges of the label and terminating the portion of the exterior surface over which the label extends

20 35. A moulded article as claimed in claim 34, wherein the groove is continuous and intermittently defines the slots.

25 36. A moulded article as claimed in any one of claims 30 to 35, wherein the Injection moulded body comprises wall strengthening portions adjacent the slots.

37. A moulded article as claimed in any one of claims 30 to 36, wherein the injection moulded body has a substantially constant thickness.

30 38. A moulded article having an exterior surface, the article comprising: an injection moulded body comprising a groove; and





a label comprising a plurality of edges, wherein the label extends over at least a portion of the exterior surface of the article and the edges of the label are received within the groove.

5     **39.** An article comprising:

a first injection moulded part having a plurality of first slots extending through the first injection moulded part;

a second injection moulded part having a plurality of second slots extending through the second injection moulded part; and

10    a label that extends over at least a portion of the first injection moulded part and a portion of the second injection moulded part, wherein portions of the label are received within the first slots and within the second slots.

15    40. A mobile cellular telephone housing comprising as a part thereof a moulded article as claimed in any one of claims 30 to 38.

**41.** An In-Mould Labelling apparatus comprising:

a multi-portion body defining a first mould void and at least one conduit for injecting material into the first mould void, a second mould void and at least  
20    one conduit for injecting material into the second mould void ; and  
means for placing a label so that it extends from the first mould void to the second mould void.

25    42. An apparatus as claimed in claim 41, wherein the multi-portion body further comprises a shut-off volume into which material is not injected, positioned between the first mould void and second mould void, wherein the placed label extends across the shut-off volume.

**43.** An In-Mould Labelling process comprising:

30    placing a label between a first mould void and a second, separate mould void; and



injecting material into the first and second mould voids.

**44.** A laminate label for use in an injection moulding process comprising a substrate layer and a fabric layer.

5

**45.** A laminate label as claimed in claim 44, wherein the fabric layer comprises Alacantara.

10

**46.** A laminate label as claimed in claim 44 or 45, wherein the substrate layer comprises polycarbonate.

**47.** A laminate label as claimed in claim 44, 45 or 46, wherein the substrate layer is less than 1 millimetre thick.

15

**48.** A laminate label as claimed in any one of claims 44 to 47, having an indent where it terminates.

20

**49.** A laminate as claimed in claim, 48, wherein the laminate is three-dimensional having sidewalls, wherein at least a portion of one side wall terminates with the indent.

**50.** An injection moulded article comprising a laminate as claimed in claim 48 or 49, wherein the indent is hidden in use.

25

**51.** A method of forming a pre-form label for use in an in mould labelling process comprising:

moulding a laminate comprising a substrate layer and a fabric layer to indent a continuous portion of the laminate; and  
cutting the laminate so that it terminates at the continuous indented portion.

30



52. A method as claimed in claim 51, wherein the step of moulding the laminate moulds the laminate into a three-dimensional shape having side walls wherein at least a portion of one side wall terminates with the indent.

5

10

15




## ABSTRACT

An In-Mould Labelling process comprising: clamping a label within a mould void of an injection moulding tool; and injecting material into the mould void while the label is clamped.

An In-Mould Labelling process comprising: placing a label between a first mould void and a second, separate mould void; and injecting material into the first and second mould voids.

10

Fig 2A.

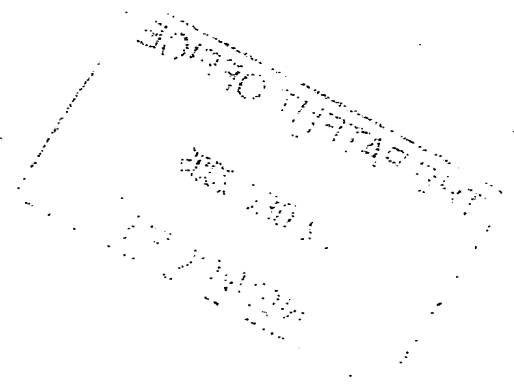





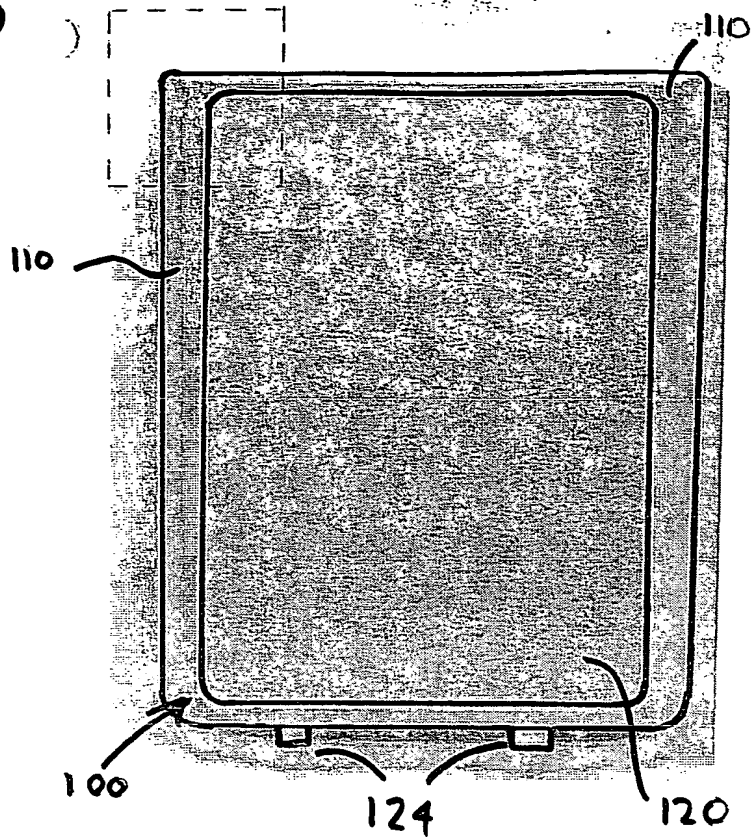


Fig. 1A

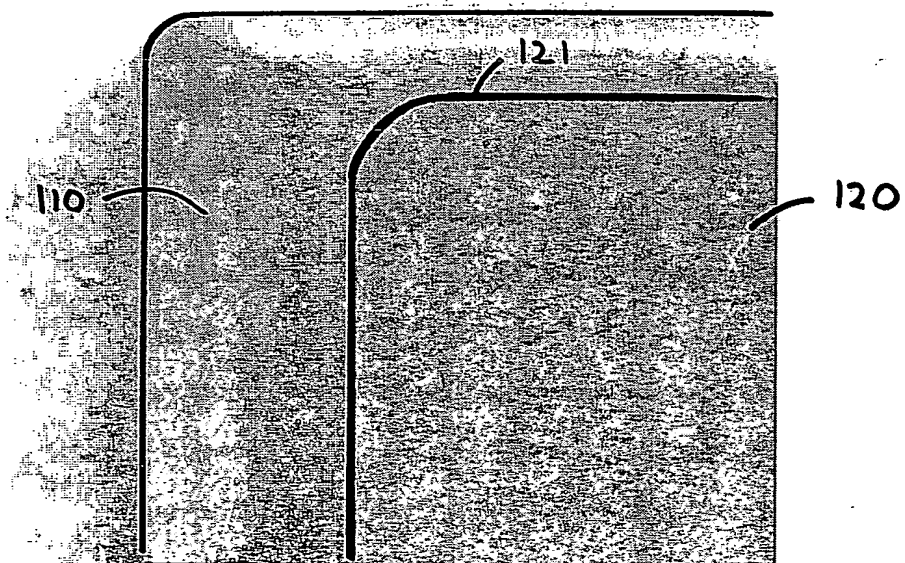
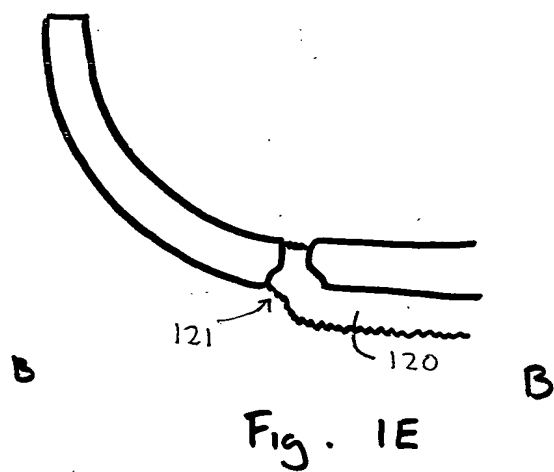
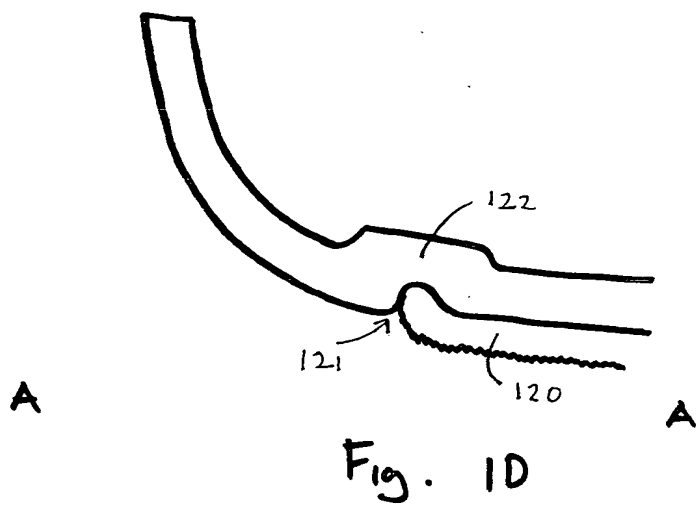
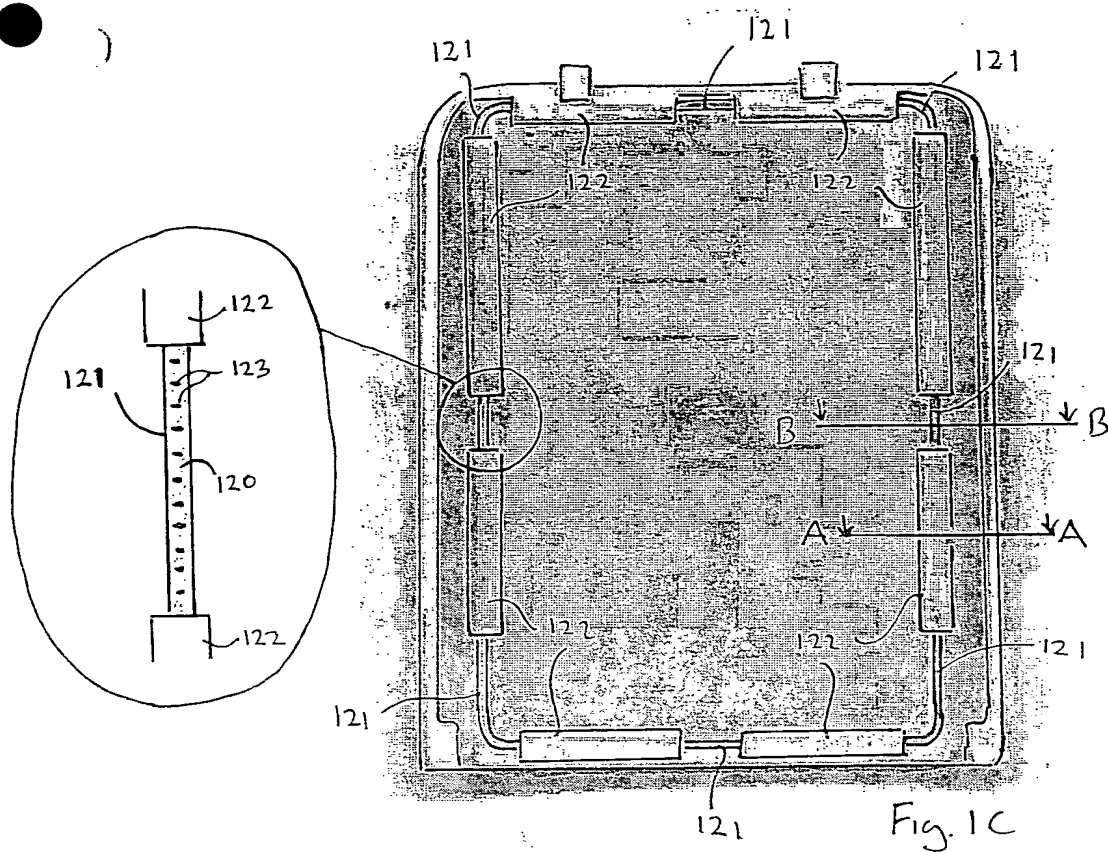


Fig. 1B







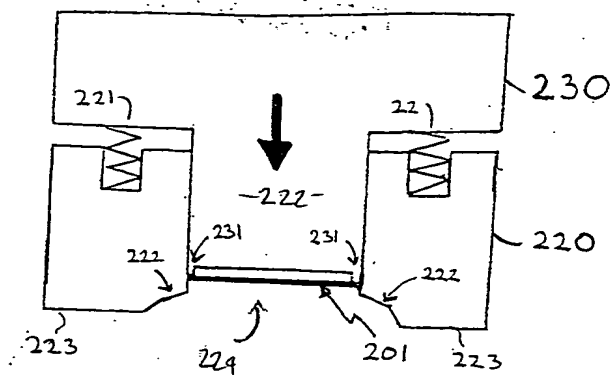


Fig. 2A

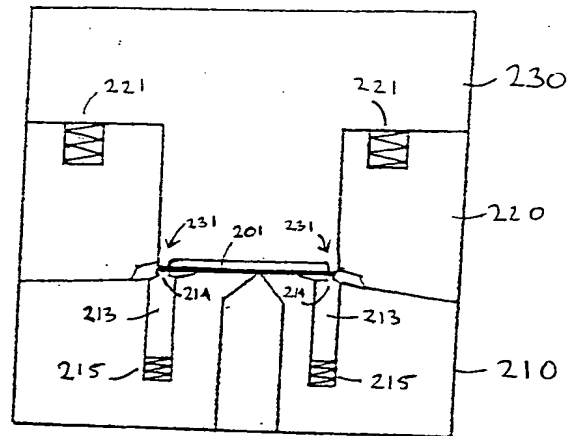
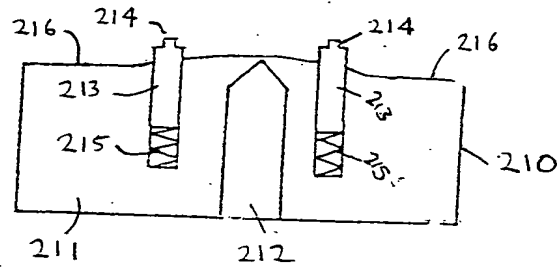


Fig. 2B

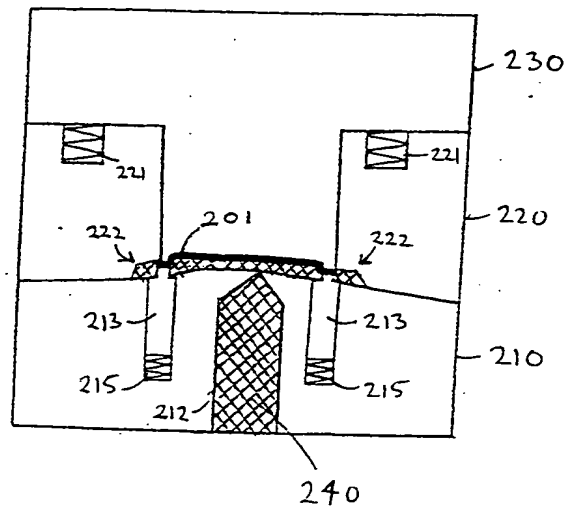


Fig. 2c



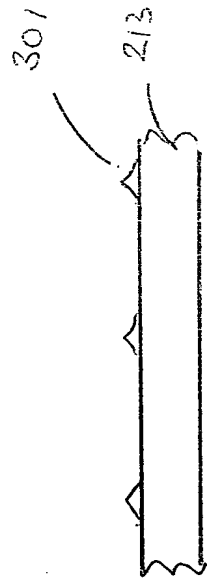


FIG. 3





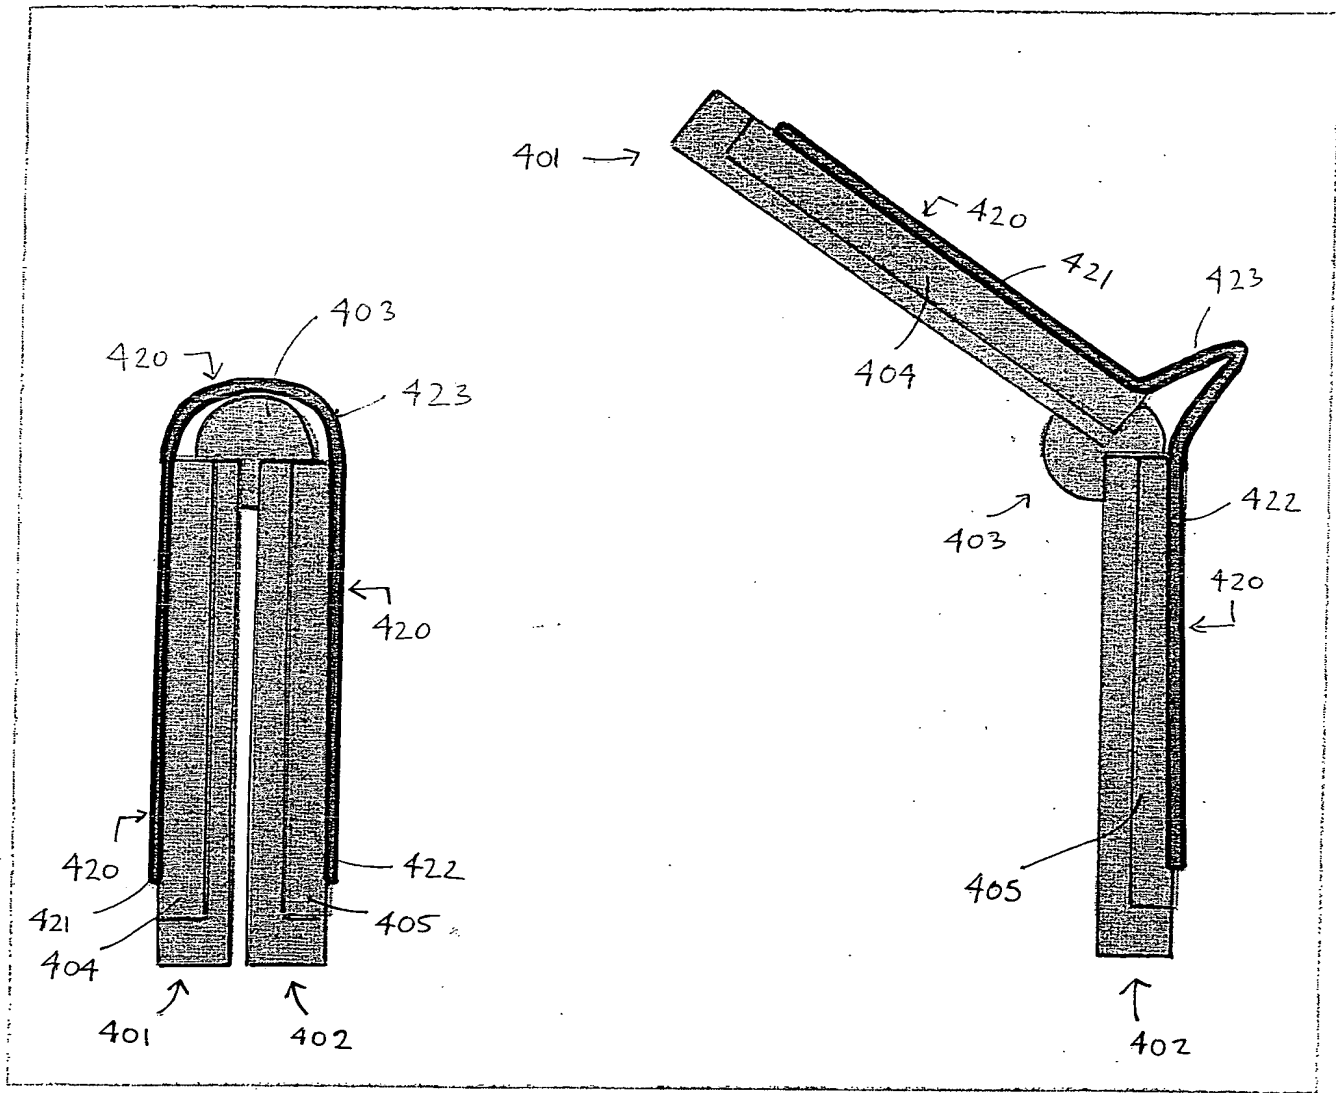
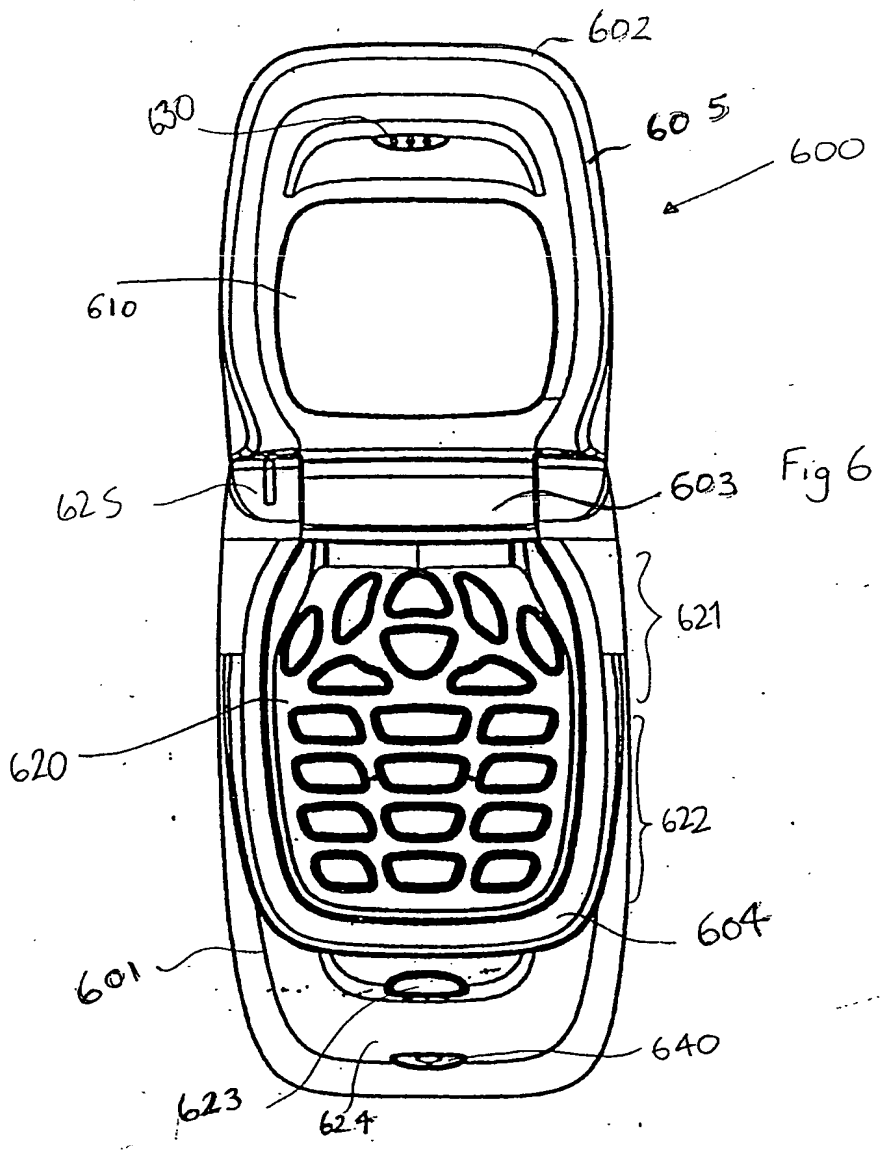
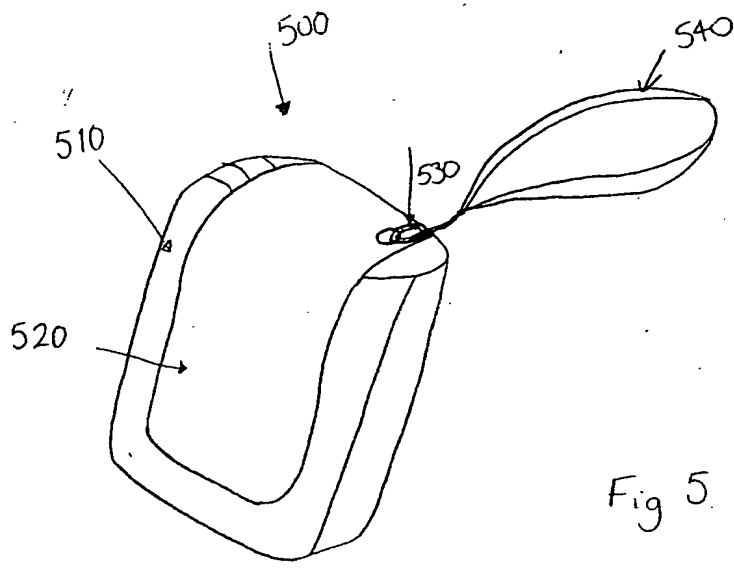


Fig. 4A

Fig. 4B







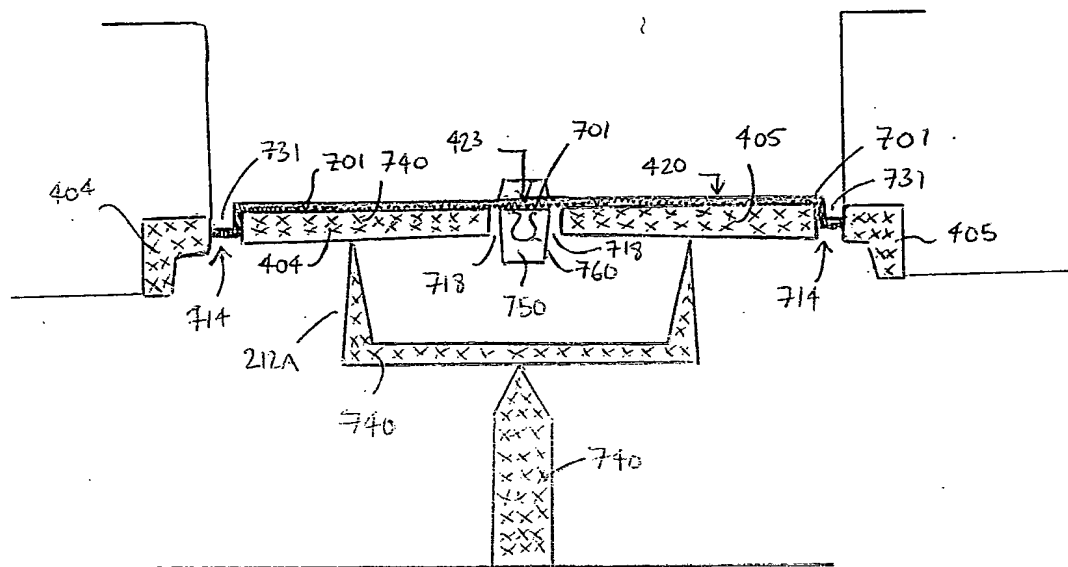


Fig. 7.



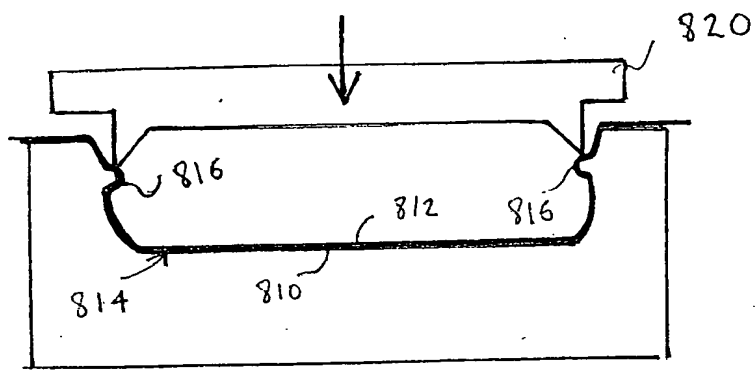


Fig. 8A

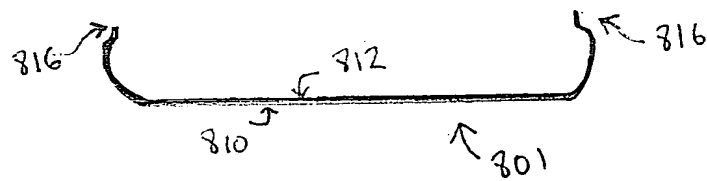


Fig. 8B

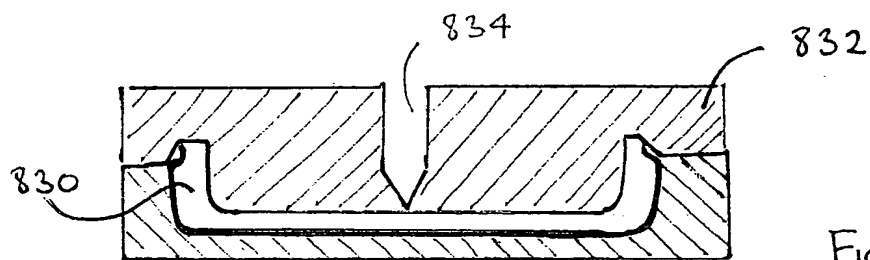


Fig. 8C

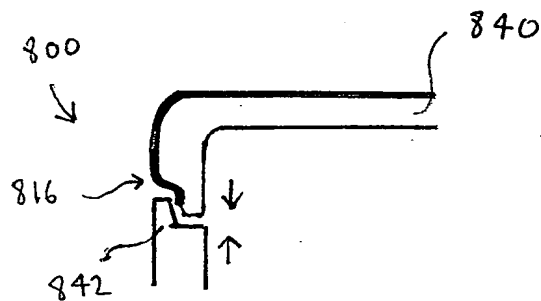


Fig. 8D





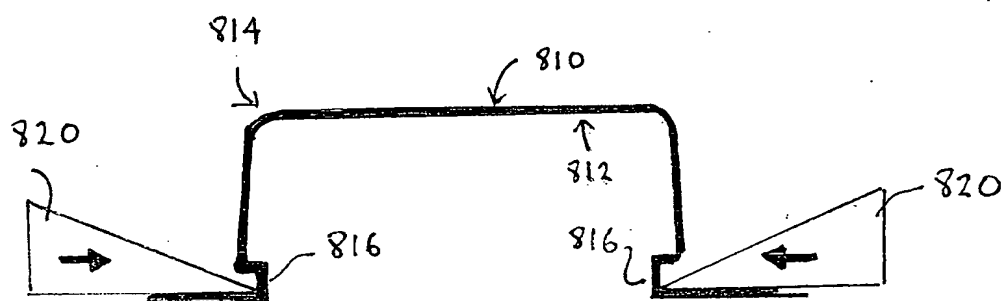


Fig. 9

